



SPECIFICATION

Product Name: 4ft 15W T8 LED Tube with External Driver

Part No: ED-T804-15W-EX-4KFR (4000K Frosted) ED-T804-15W-EX-5KFR (5000K Frosted)




1. Before using our product, please read the specification carefully
2. AC input voltage range has to match the equipment input voltage.
3. Before making wiring connections please follow wiring diagram.
4. The specification are for the above product only.

UL Listed, DLC Certified

T8 Tube Technical Parameters


Model No.	ED-T804-15W-EX-4KFR / ED-T804-15W-EX-5KFR								Remark	
Related Voltage	AC100V-120VAC or AC100-277V									
Rated working frequency	50-60HZ									
Rated Power	16.5W MAX									
Power factor	0.90									
Type	External Driver, one driver for one tube and one driver for two tubes									
Size (mm)	Φ26 X 1200mm									
Light source	SMD 2835 (96 pcs)									
Luminous flux (lm)	CCT	3000K±300K	3500K±300K	4000K±300K	4500K±300K	5000K±300K	5500K±300K	6000K±300K		
	Min	>1500	>1500	>1550	>1550	>1600	>1650	>1650		
	Typical	1500	1500	1550	1550	1600	1650	1650		
Luminous flux (lm)	suggested environmental temperature	-10°C ~30°C								
	Light on	8 hours/day								
	3 years	≥80%								
	L70 Life time	50000 hours								
CRI:Ra	≥80									
Location of power supply	One end connection and two ends connection									
Beam angle	120°									
Thermal Layer Material	6063 aluminum profile									
Certificates	cUL,UL,DLC, TUV,MARK,SAA,C-TICK,ERP,CE,ROHS,REACH									
Warranty Period	5 years									
Weight	365g									
Storage Condition	Relative humidity <85% of indoor air ventilation, should not have corrosive gas, storage temperature—20°C-50°C									

Structure Chart

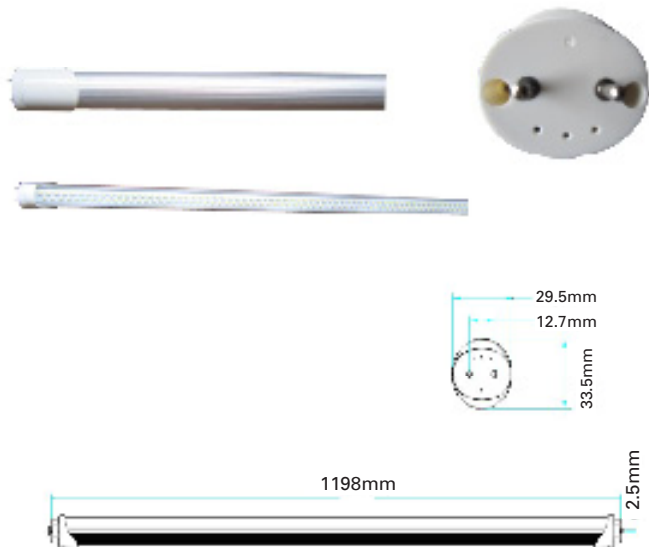

Size Drawing

Package Drawing

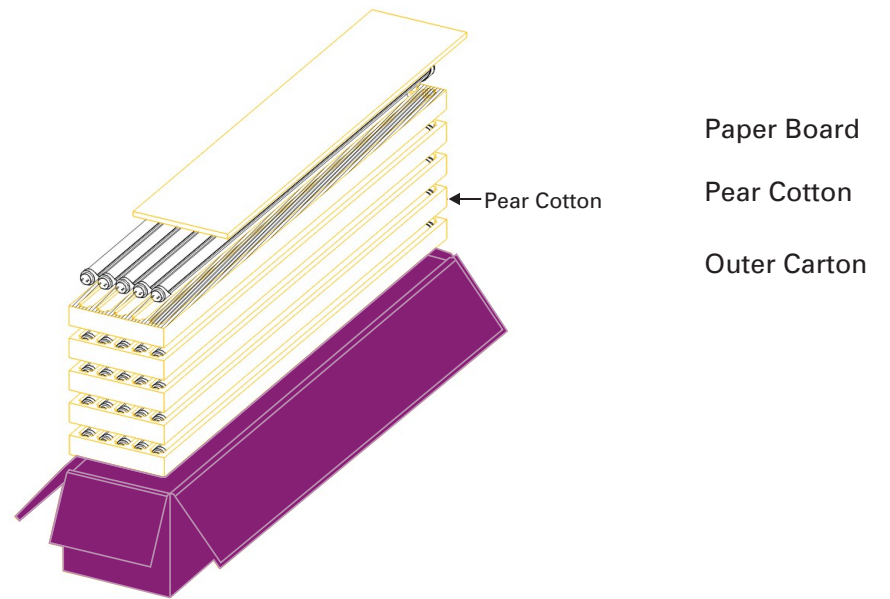

Outer Carton: 1250x220x230mm
 Quantity: 30pcs / CTN
 Weight: 10.2kg / 22.5lbs