



SPECIFICATION

Product Name: 4ft 30W T5 LED Tube with External Driver

Part No: ED-T504-30W-EX-4KFR (4000K Frosted) ED-T504-30W-EX-5KFR (5000K Frosted)




1. Before using our product, please read the specification carefully
2. AC input voltage range has to match the equipment input voltage.
3. Before making wiring connections please follow wiring diagram.
4. The specification are for the above product only.

UL Listed, DLC Certified

T5 Tube Technical Parameters


Model No.		ED-T504-30W-EX-4KFR / ED-T504-30W-EX-5KFR			Remark
Related Voltage		AC100-120VAC or AC100V-277V or AC100-382V			
Rated working frequency		50-60HZ			
Rated Power		32.5W MAX			
Power factor		0.95			
Type		External Driver, one driver for one tube and one driver for two tubes			
Size (mm)		Φ21 X 1200mm			
Light source		SMD 2835 (144 pcs)			
Luminous flux (lm)	CCT	3000K±300K	4500±300K	5000K±300K	
	Min	>3450	>3450	>3550	
	Typical	3450	3450	3550	
Luminous flux (lm)	suggested environmental temperature	-10°C ~30°C			
	Light on	8 hours/day			
	3 years	≥80%			
	L70 Life time	50000 hours			
CRI:Ra		≥80			
Location of power supply		One end connection and two ends connection			
Beam angle		120°			
Thermal Layer Material		6063 aluminum profile			
Certificates		cUL,UL			
Warranty Period		5 years			
Weight		370g			
Storage Condition		Relative humidity <85% of indoor air ventilation, should not have corrosive gas, storage temperature—20°C-50°C			

Structure Chart

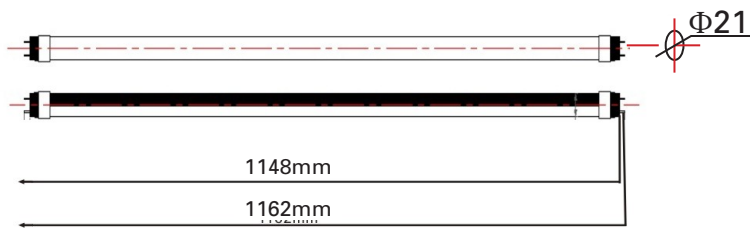

Size Drawing

Package Drawing

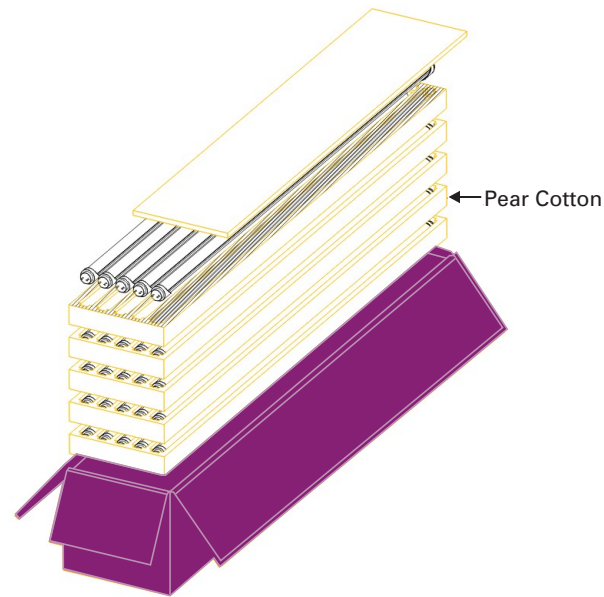

Paper Board
 Pear Cotton
 Outer Carton

Outer Carton: 1260x220x250mm
 Quantity: 50pcs / CTN
 Weight: 11.78kg / 26lbs